

Technical Data Sheet

Pro-Steel Brick Faced Lintels

- ✓ **BBA Certified Resin**
- ✓ **BS EN 845-2 Lintel Design**
- ✓ **BS EN 846-9 Lintel Testing**
- ✓ **BS 5977 Lintel Specification**
- ✓ **Accelerated Weather Tested**
 - Saturated Freeze-Thaw
 - Bond Strength - Pre & Post Weathered
 - Impact Strength - Pre & Post Weathered
- ✓ **Austenitic Stainless Steel**
 - Grade 304 (1.4301) 316 (1.4404)



LUCIDEON

Brick Slip Bond Strength, Durability & Lintels Tested by Lucideon





Technical Data

The Fab-Lite Facades Stretcher Bond Lintel Range is designed to allow an opening to be created in a single leaf of masonry, typically the external leaf of a cavity with an integrated brick slip soffit feature. The brick slip soffit feature is bonded to the lintel carrier using a specially formulated resin adhesive in a stretcher/running bond to match seamlessly with the facing brickwork and reveals where relevant.

Design & Testing

Both the lintels and the brick slips have been independently tested by Notified and Technical Approval Bodies to evaluate and validate the load capacity, physical performance and long term durability of all components. The lintels have been designed in line with the requirements of BS EN 845-2 & BS 5977-1 and tested in line with BS EN 846-9. The brick slips are tested using the guidance of ETAG 034 to evaluate the accelerated Freeze/Thaw weather resistance both saturated and dried of the slips bonded to backing structures of various materials including stainless steel and powder coated galvanised steel. The tests include the evaluation of bond strength and durability of the brick slips bonded to stainless steel where a service life of 60 years can be achieved. The bond strength and impact resistance of the brick slips was tested before and after the accelerated cyclic weather tests to validate the integrity and durability of the system. The tests included:

- Heat / Rain weathering to ETAG034 – Weathered samples only. 
- Bond Strength testing using ETAG004 as guidance- Control and Weathered samples
- Impact testing to ISO 7892 - Control and Weathered samples 



LUCIDEON




Technical Data Sheet

Installation

Lintels should always be propped during construction to achieve the safe working load capacities declared in the design tables below. A separate DPC is required above the lintel. Wall ties should be installed within 300mm of the lintel at a maximum of 450mm centres to ensure that the masonry carried by the lintel is restrained and any potential overturning and deflection is minimised.

The standard lintel range is supplied in 150mm incremental lengths. Lintels of alternative lengths and load capacities outside of the details provided in the following load tables can be designed and supplied to meet with project specific requirements. Lintels should be selected to ensure that a minimum of 150mm bearing either side of the opening is always achieved.

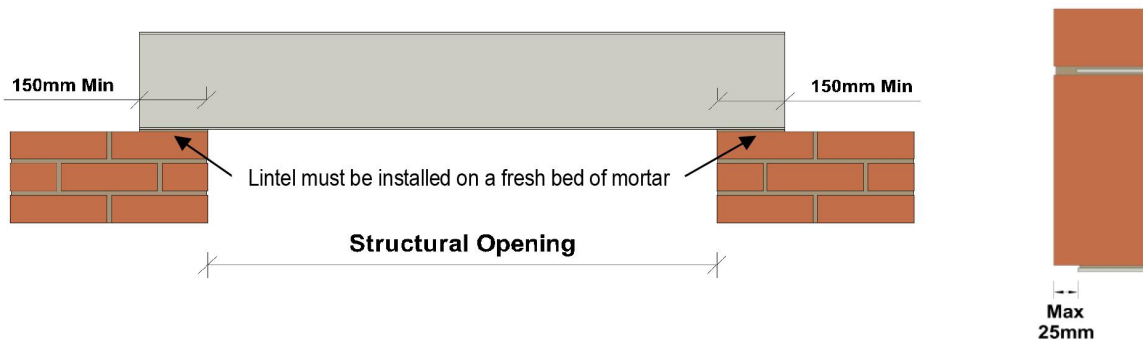

In accordance with NHBC requirements, lintels used in external walls should be installed with a separate flexible damp proof course. This should be combined with either stop ends or as an alternative the DPC should extend between 50 and 150mm beyond the end of the lintel bearing.

Restrictions

1. Lintels must never be cut to length or modified in any way without prior permission from ACS.
2. No more than 1.5 metres of brickwork should be built off the lintel in one day in accordance with PD 6697:2010.
3. Where the method for assessing the load carried by lintels is designed in accordance with BS EN 1996-1-1 it is assumed that:
 - a. The masonry is constructed following the recommendations of BS EN 1996-2.
 - b. The height of masonry above the lintel at mid-span is not less than 0.6 times the clear span of the lintel.
 - c. The height of masonry above the supports is not less than 600 mm.
 - d. The masonry is continuous within the area defined by the conditions given in b) and c).
 - e. Where there is a single opening spanned by the lintel, the width of masonry on either side of the opening is not less than 600 mm or 0.2 times the clear span of the lintel whichever is the greater.
 - f. Where there is a series of openings at the level of the opening spanned by the lintel, the length of masonry between the external corner of the wall and the side of the adjacent opening is not less than 600 mm or 0.2 times the longest clear span, whichever is the greater.

Technical Data Sheet

Safety

Although every effort is made to remove sharp edges during the manufacture of the product, appropriate personal protective equipment should always be worn when handling and installing masonry support to avoid injury.







Materials

PD 6697:2010 states that austenitic stainless steel must be used for products in contact with or embedded in an external wall for all buildings exceeding three storeys in a non-aggressive environment. In aggressive environments, such as coastal sites, products in both leaves of an external wall should always be austenitic stainless steel.


Shuffle Brick

Pro-Steel Stretcher Bond Lintels are typically supplied with a 'Shuffle Brick' arrangement to allow the lintel to be coursed into the facing brickwork regardless of the whether the opening starts on a half or full brick. Structural openings are most typically set at divisions of full or half brick dimensions. The illustration below demonstrates how the stretcher bond lintel should be set to accommodate for the various coursing conditions.

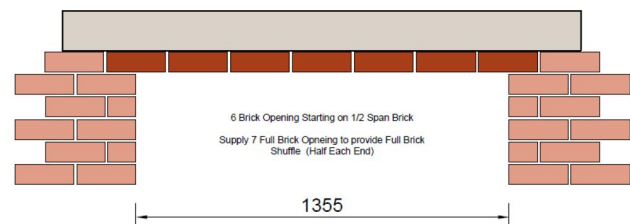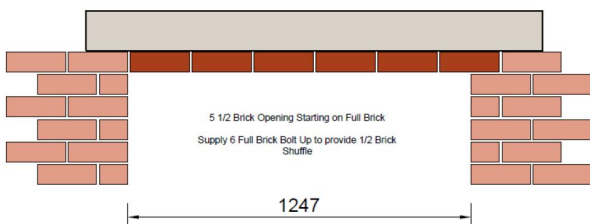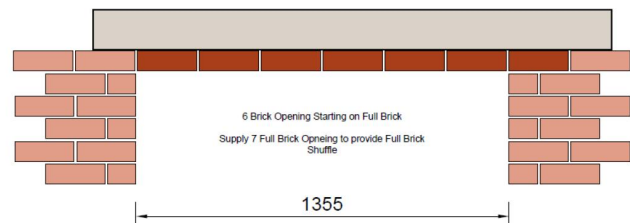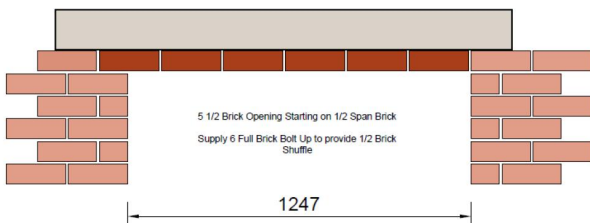


Technical Data Sheet

Standard Duty 'L' Section Lintel

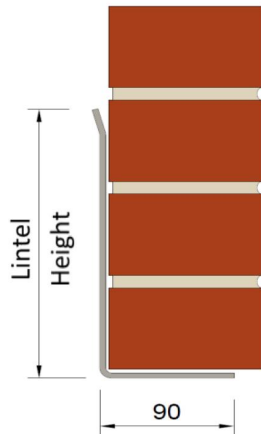


L Section Lintels				
Standard Lengths (mm)	600-1200	1201-1500	1501-2100	2101-3000
Total UDL (kN)	3.40	4.60	6.20	11.50
Lintel Height (mm)	88	131	167	215
Weight / Metre (kg)	2.90	3.58	4.16	7.37
Gauge (mm)	2.00	2.00	2.00	3.00

Heavy Duty 'C' Section Lintel

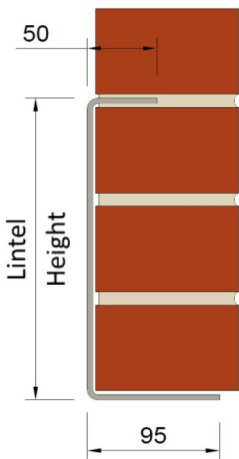

C Section Lintels						
Standard Lengths (mm)	600-1200	1201-1500	1501-2100	2101-3000	3001-3900	3901-4500
Total UDL (kN)	8.60	16.00	16.00	16.00	20.00	20.00
Lintel Height (mm)	154	229	229	229	229	229
Weight / Metre (kg)	4.65	5.85	5.85	8.72	11.49	14.27
Gauge (mm)	2.00	2.00	3.00	3.00	4.00	5.00

Extra Heavy Duty 'XHD C2' Section Lintel

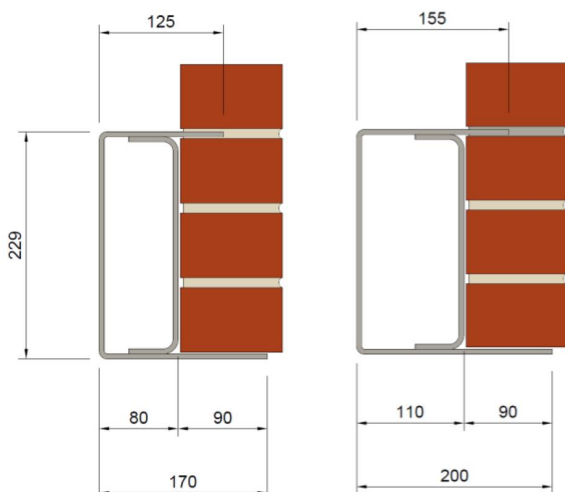

	'C2/170'	'C2/200'
Standards Lengths (mm)	4900	4900
Total UDL (kN)	28.00	32.00
Lintel Height (mm)	229	229
Weight / Metre (kg)	23.30	25.22
Lintel Gauge (mm)	4.00	4.00

Alternative lintels can be designed to suit specific loading requirements outside of the standard range detailed in the tables above.